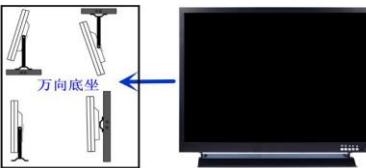


15/17" Industrial Grade CCTV monitor

Size	Model	Picture	Parameters																																																																																	
15/17"	MC150MA /MC170M A	  <p>一个底座三种摆放模式：</p> <p>可以台面摆放，可以壁挂挂墙，可以吊天花</p>   <p>正面简易的按键操作</p>	<table border="1"> <tr> <td rowspan="10">Panel</td> <td>Size</td><td>15/17"(high brightness,high resolution)</td></tr> <tr> <td>Display area</td><td>340mm(W)×272mm(H)</td></tr> <tr> <td>Aspect ratio</td><td>4 : 3</td></tr> <tr> <td>Dot Pitch</td><td>0.264mmx0.264mm(H,V)</td></tr> <tr> <td>Resolution</td><td>15": 1024*768 17": 1280x1024</td></tr> <tr> <td>Contrast ratio</td><td>500:1</td></tr> <tr> <td>Brightness</td><td>450cd/m²</td></tr> <tr> <td>Response time</td><td>5ms</td></tr> <tr> <td>Viewing angle</td><td>178°/178°</td></tr> <tr> <td>Color</td><td>16.7M</td></tr> <tr> <td>Life span</td><td>50,000(hr)</td></tr> </table> <table border="1"> <tr> <td rowspan="10">Exclusive function</td> <td colspan="2">Industrial metal shell,wearable and shockproof, anti-jamming, suitable for different environment, Great Radiating</td></tr> <tr> <td colspan="2">Can make as digital TV, industrial equipment display, Closed-circuit monitor display, computer display</td></tr> <tr> <td colspan="2">4D color management and image processing technology</td></tr> <tr> <td colspan="2">Multi inputs available</td></tr> <tr> <td colspan="2">High Brightness, Full screen display uniformity</td></tr> <tr> <td colspan="2">brightness enhancement</td></tr> <tr> <td colspan="2">Instant digital chroma enhancement, Automatic color correction</td></tr> <tr> <td colspan="2">DNX (Digital Natural Expression) ,Motion compensation image processing technology</td></tr> <tr> <td colspan="2">Long life、low Radiation、Environmental protection;</td></tr> </table> <table border="1"> <tr> <td rowspan="8">Interface</td> <td>VGA</td><td>15 Pin VGA input</td></tr> <tr> <td>BNC1</td><td>BNC input</td></tr> <tr> <td>BNC2</td><td>BNC input</td></tr> <tr> <td>BNC OUT</td><td>BNC output</td></tr> <tr> <td>HDMI</td><td>HDMI interface(1080p/1080i/720p)</td></tr> <tr> <td>YPBPR R/L</td><td>chromatic aberration signal & audio signal input</td></tr> <tr> <td>Audio input</td><td>PC audio input</td></tr> <tr> <td>Audio output</td><td>PC audio output(Digital)</td></tr> </table> <table border="1"> <tr> <td>Color system</td><td colspan="2">PAL/NTSC/SECAM</td></tr> <tr> <td>OSD</td><td>Multi langauge</td><td>English,French,Spanish,Polish,Portuguese,Italian,German,Dutch,Russian</td></tr> <tr> <td>Working temnperature</td><td colspan="2">0°C - 50°C</td></tr> <tr> <td>Working Humidity</td><td colspan="2">10-90%</td></tr> <tr> <td>Installation</td><td colspan="2">Desktop ,Wall mount,can hang on the ceiling</td></tr> <tr> <td>Packing size</td><td colspan="2">5units/carton,external carton size: 410*680*500mm</td></tr> <tr> <td>Stand-alone power</td><td colspan="2"><35W</td></tr> </table>	Panel	Size	15/17"(high brightness,high resolution)	Display area	340mm(W)×272mm(H)	Aspect ratio	4 : 3	Dot Pitch	0.264mmx0.264mm(H,V)	Resolution	15": 1024*768 17": 1280x1024	Contrast ratio	500:1	Brightness	450cd/m ²	Response time	5ms	Viewing angle	178°/178°	Color	16.7M	Life span	50,000(hr)	Exclusive function	Industrial metal shell,wearable and shockproof, anti-jamming, suitable for different environment, Great Radiating		Can make as digital TV, industrial equipment display, Closed-circuit monitor display, computer display		4D color management and image processing technology		Multi inputs available		High Brightness, Full screen display uniformity		brightness enhancement		Instant digital chroma enhancement, Automatic color correction		DNX (Digital Natural Expression) ,Motion compensation image processing technology		Long life、low Radiation、Environmental protection;		Interface	VGA	15 Pin VGA input	BNC1	BNC input	BNC2	BNC input	BNC OUT	BNC output	HDMI	HDMI interface(1080p/1080i/720p)	YPBPR R/L	chromatic aberration signal & audio signal input	Audio input	PC audio input	Audio output	PC audio output(Digital)	Color system	PAL/NTSC/SECAM		OSD	Multi langauge	English,French,Spanish,Polish,Portuguese,Italian,German,Dutch,Russian	Working temnperature	0°C - 50°C		Working Humidity	10-90%		Installation	Desktop ,Wall mount,can hang on the ceiling		Packing size	5units/carton,external carton size: 410*680*500mm		Stand-alone power	<35W		
Panel	Size	15/17"(high brightness,high resolution)																																																																																		
	Display area	340mm(W)×272mm(H)																																																																																		
	Aspect ratio	4 : 3																																																																																		
	Dot Pitch	0.264mmx0.264mm(H,V)																																																																																		
	Resolution	15": 1024*768 17": 1280x1024																																																																																		
	Contrast ratio	500:1																																																																																		
	Brightness	450cd/m ²																																																																																		
	Response time	5ms																																																																																		
	Viewing angle	178°/178°																																																																																		
	Color	16.7M																																																																																		
Life span	50,000(hr)																																																																																			
Exclusive function	Industrial metal shell,wearable and shockproof, anti-jamming, suitable for different environment, Great Radiating																																																																																			
	Can make as digital TV, industrial equipment display, Closed-circuit monitor display, computer display																																																																																			
	4D color management and image processing technology																																																																																			
	Multi inputs available																																																																																			
	High Brightness, Full screen display uniformity																																																																																			
	brightness enhancement																																																																																			
	Instant digital chroma enhancement, Automatic color correction																																																																																			
	DNX (Digital Natural Expression) ,Motion compensation image processing technology																																																																																			
	Long life、low Radiation、Environmental protection;																																																																																			
	Interface	VGA	15 Pin VGA input																																																																																	
BNC1		BNC input																																																																																		
BNC2		BNC input																																																																																		
BNC OUT		BNC output																																																																																		
HDMI		HDMI interface(1080p/1080i/720p)																																																																																		
YPBPR R/L		chromatic aberration signal & audio signal input																																																																																		
Audio input		PC audio input																																																																																		
Audio output		PC audio output(Digital)																																																																																		
Color system	PAL/NTSC/SECAM																																																																																			
OSD	Multi langauge	English,French,Spanish,Polish,Portuguese,Italian,German,Dutch,Russian																																																																																		
Working temnperature	0°C - 50°C																																																																																			
Working Humidity	10-90%																																																																																			
Installation	Desktop ,Wall mount,can hang on the ceiling																																																																																			
Packing size	5units/carton,external carton size: 410*680*500mm																																																																																			
Stand-alone power	<35W																																																																																			